

# MP 174565 xtd

## Rechargeable Li-ion cell

3.65 V high energy Li-ion cell with extra life and operational temperature

Saft's MP 174565 xtd cell is ideally suited for applications requiring high energy and long operating life, either in calendar, cycling or floating conditions, with excellent performance in unregulated temperature environments from  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ .

### Benefits

- Excellent operating life in calendar, cycling and floating conditions
- Unrivalled operating temperature range from  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- Long shelf life with extremely low capacity loss under storage
- Easy assembly into various designs and formats of batteries.
- Smaller environmental footprint than other technologies

### Key features

- High energy density (264 Wh/l, and 150 Wh/kg)
- Aluminium casing
- Hermetically sealed
- Operates in any orientation
- Maintenance free
- No memory effect
- Manufactured in the EU

### Designed to meet all major quality, safety and environmental standards

- Safety: UL 1642 and IEC 62133 Ed. 2
- Transport: UN 3480, UN 3481
- Quality: ISO 9001, ISO 13485  
Saft World Class program
- Environment: ISO 14001, RoHS and REACH compliant

### Typical applications

- Backup systems for industrial and commercial equipment
- Medical devices
- Tracking
- Industrial applications
- Internet of Things
- Wireless Sensor Networks
- Lighting & signalling



### Electrical characteristics

Typical capacity (at C/5 rate, $+25^{\circ}\text{C}$ , 2.5V cut-off) <sup>(i)</sup>	4.0 Ah	
Nominal voltage	3.65 V	
Nominal energy	14.6 Wh	
Recommended maximum discharge current <sup>(ii)</sup>	Continuous	8 A ( $\sim 2\text{C}$ rate)
	Pulse	16 A ( $\sim 4\text{C}$ rate)

### Physical characteristics (sleeved cell)

Thickness <sup>(iii)</sup>	18.65 mm	
Width	45.3 mm	
Height (including terminals)	68.5 mm	
Typical weight	97 g	
Volume (including terminals)	0.057 l	
IEC cell designation	INP19/46/69	
Saft internal cell designation	INT 174565 xtd	
Saft part number	07946G	
Saft model / type reference	MP 174565 xtd	GP30612

### Operating conditions



Typical cut-off voltage	2.5 V	
Charging method	Constant current/Constant voltage	
Charging voltage	4.2 V	
Maximum continuous charge current <sup>(iv)</sup>	4 A ( $\sim 1\text{C}$ rate)	
Operating temperatures	Charge	$-30^{\circ}\text{C}$ to $+85^{\circ}\text{C}$
	Discharge	$-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$
Storage & transportation temperatures	Recommended	$+15^{\circ}\text{C}$ to $+30^{\circ}\text{C}$
	Allowable	$-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$

[i] Can vary depending on temperature and discharge rate

[ii] Can vary depending on temperatures. Consult Saft

[iii] At beginning of life, 100% State-of-Charge. May increase with temperature and the cells' calendar life.

[iv] For optimised charging below  $0^{\circ}\text{C}$  and above  $+60^{\circ}\text{C}$ , consult Saft

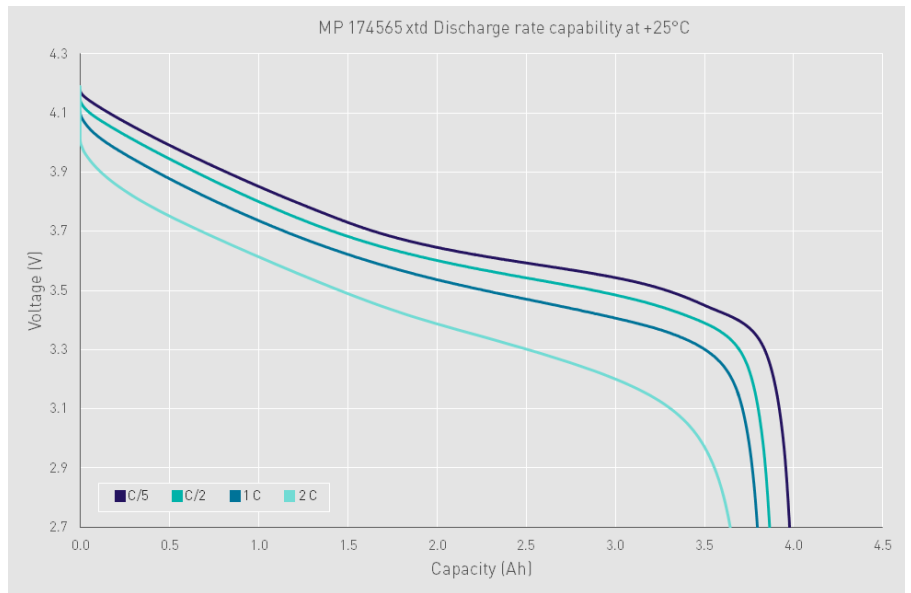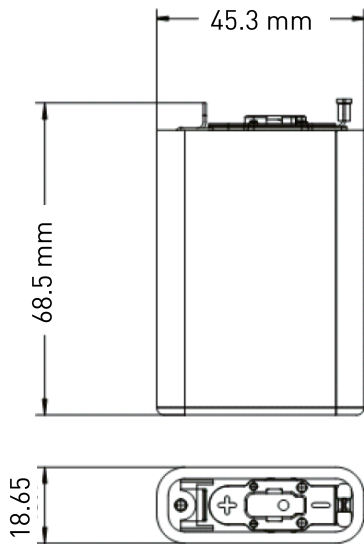


### Battery assembly

Individual lithium-ion cells need to be mechanically and electrically assembled into battery systems to operate properly. The battery system includes electronic devices for performance, thermal and safety management specific to each application. Please contact Saft for your specific applications requirements.

### Battery-level features

- Saft provides complete battery system designs
- Incorporating several levels of redundant safety features to prevent abuse conditions such as over-charge, over-discharge, and short circuits

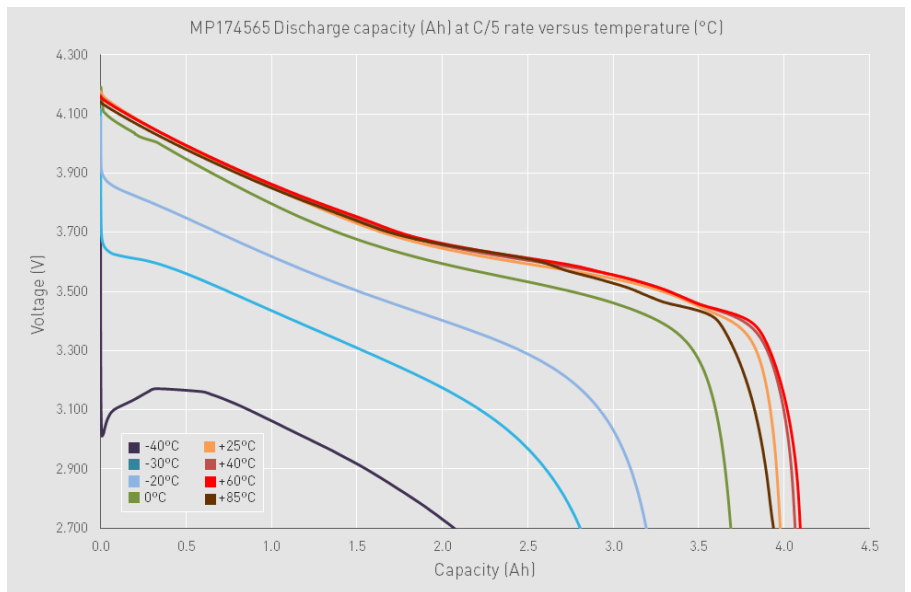


### Storage

- The storage area should be clean, cool (preferably not exceeding +30°C), dry and ventilated

### Warning

- Do not crush, short-circuit, incinerate, dismantle, immerse in any liquid, heat above +85°C
- Observe charging conditions

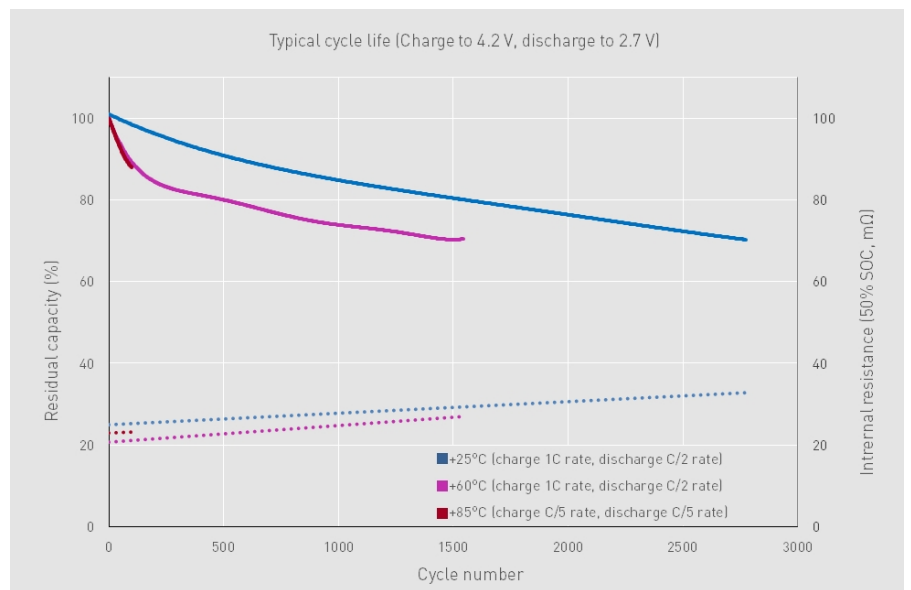

## Saft

26, Quai Charles Pasqua,  
92300 Levallois Perret -France  
Tel.: +33 (0)1 49 93 19 18  
Fax: +33 (0)1 49 93 19 69  
www.saftbatteries.com

## Saft America, Inc.

313 Crescent Street  
Valdese, NC 28690—USA  
Tel.: +1 (828) 874 41 11  
Fax: +1 (828) 879 39 81  
www.saftbatteries.com

Doc N°: 31110-2-0819

Edition: August 2019

Information in this document is subject to change without notice and becomes contractual only after written confirmation by Saft.

Published by the Communication Department

Photo credit: Saft

Produced by CE Marketing Department

